




Z.I.S. SPEZIALBAUSTOFFE

Cable conduits made of PE-HD with plug-in sleeve

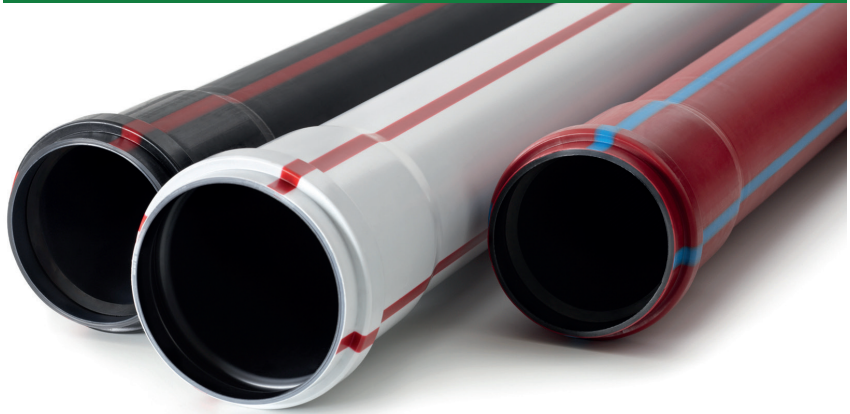

Standard designs

Manufactured acc. to DIN 16876	
Sleeve type	integrally moulded plug-in sleeve (SM)
Sealing ring	compression lip sealing ring, type "SX" (inserted in the factory)
Sharp end	with plug-in depth marking and chamfer
Length	6 m
Colour	black
Inner surface	smooth

Possible designs

Quality	DIN 16874
Length	1 m to 6 m
Coloured stripes	co-extruded
Colour	on request
Outer surface	coloured, co-extruded or solid-dyed
Inner surface	inner grooves for reducing the cable pull-in forces
Labelling	acc. to customer specifications

Item designation	Outer diameter (mm)	Wall thickness (mm)	SDR types	Pallet contents (m)	Weight (kg/m)
KSR 63 x 3,0 SM	63	3,0	21	1020	0,586
KSR 110 x 3,4 SM	110	3,4	33	516	1,170
KSR 110 x 4,2 SM	110	4,2	26	516	1,430
KSR 110 x 5,3 SM	110	5,3	21	516	1,770
KSR 110 x 6,3 SM	110	6,3	17,6	516	2,080
KSR 110 x 10,0 ASM*	110	10,0	11	516	3,140
KSR 125 x 3,9 SM	125	3,9	33	408	1,510
KSR 125 x 4,8 SM	125	4,8	26	408	1,840
KSR 125 x 7,1 ASM*	125	7,1	17,6	306	2,660
KSR 140 x 4,3 SM	140	4,3	33	318	1,884
KSR 160 x 4,9 SM	160	4,9	33	234	2,420
KSR 160 x 6,2 SM	160	6,2	26	234	3,040
KSR 160 x 9,1 ASM*	160	9,1	17,6	234	4,360

Z.I.S. SPEZIALBAUSTOFFE GMBH

Karl-Rapp-Straße 1 · 92442 Wackersdorf · Germany
 Tel.: +49 (0)94 31 / 797 99-0 · Fax: +49 (0)94 31 / 797 99-20
 info@zis-spezialbaustoffe.de · www.zis-spezialbaustoffe.de



Wir sind Mitglied bei
 der Gütegemeinschaft
 Leitungstiefbau e.V.