




Z.I.S. SPEZIALBAUSTOFFE

Cable conduits and blanks made of PE-HD with smooth ends

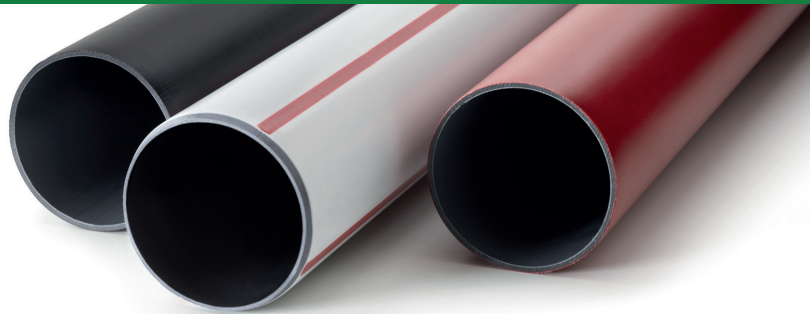

### Standard design

|                                |                       |
|--------------------------------|-----------------------|
| Manufactured acc. to DIN 16876 |                       |
| <b>Length</b>                  | 6 m                   |
| <b>Smooth ends</b>             | onesided with chamfer |
| <b>Colour</b>                  | black                 |
| <b>Inner surface</b>           | smooth                |

### Possible designs

|                         |   |
|-------------------------|---|
| <b>Quality</b>          | DIN 16874   |
| <b>Length</b>           | 1 m to 12 m   |
| <b>Coloured stripes</b> | co-extruded   |
| <b>Colour</b>           | on request  |
| <b>Outer surface</b>    | coloured, co-extruded or solid dyed                 |
| <b>Inner surface</b>    | inner grooves for reducing the cable pull-in forces |
| <b>Labelling</b>        | acc. to customer specifications                     |
| <b>Chamfer</b>          | two-sides or without                                |

| Item designation         | Outer diameter<br>(mm) | SDR type | Wall thickness<br>(mm) | Pallet contents<br>(m) | Weight<br>(kg/m) |
|--------------------------|------------------------|----------|------------------------|------------------------|------------------|
| <b>KSR 32 x 3,0 GE</b>   | 32                     | 11       | 3,0                    |                        | 0,272            |
| <b>KSR 40 x 3,7 GE</b>   | 40                     | 11       | 3,7                    |                        | 0,430            |
| <b>KSR 50 x 4,6 GE</b>   | 50                     | 11       | 4,6                    | 1200                   | 0,666            |
| <b>KSR 63 x 3,0 GE</b>   | 63                     | 21       | 3,0                    | 1020                   | 0,586            |
| <b>KSR 63 x 5,8 GE</b>   | 63                     | 11       | 5,8                    | 1020                   | 1,050            |
| <b>KSR 75 x 6,8 GE</b>   | 75                     | 11       | 6,8                    |                        | 1,470            |
| <b>KSR 110 x 3,4 GE</b>  | 110                    | 33       | 3,4                    | 516                    | 1,170            |
| <b>KSR 110 x 4,2 GE</b>  | 110                    | 26       | 4,2                    | 516                    | 1,430            |
| <b>KSR 110 x 5,3 GE</b>  | 110                    | 21       | 5,3                    | 516                    | 1,770            |
| <b>KSR 110 x 6,3 GE</b>  | 110                    | 17,6     | 6,3                    | 516                    | 2,080            |
| <b>KSR 110 x 10,0 GE</b> | 110                    | 11       | 10,0                   | 516                    | 3,140            |
| <b>KSR 125 x 3,9 GE</b>  | 125                    | 33       | 3,9                    | 408                    | 1,510            |
| <b>KSR 125 x 4,8 GE</b>  | 125                    | 26       | 4,8                    | 408                    | 1,840            |
| <b>KSR 125 x 7,1 GE</b>  | 125                    | 17,6     | 7,1                    | 306                    | 2,660            |
| <b>KSR 140 x 4,3 GE</b>  | 140                    | 33       | 4,3                    | 318                    | 1,884            |
| <b>KSR 160 x 4,9 GE</b>  | 160                    | 33       | 4,9                    | 234                    | 2,420            |
| <b>KSR 160 x 6,2 GE</b>  | 160                    | 26       | 6,2                    | 234                    | 3,040            |

Z.I.S. SPEZIALBAUSTOFFE GMBH

Karl-Rapp-Straße 1 · 92442 Wackersdorf · Germany  
 Tel.: +49 (0)94 31 / 797 99-0 · Fax: +49 (0)94 31 / 797 99-20  
 info@zis-spezialbaustoffe.de · www.zis-spezialbaustoffe.de



Wir sind Mitglied bei  
 der Gütegemeinschaft  
 Leitungstiefbau e.V.