




Z.I.S. SPEZIALBAUSTOFFE

Cable conduits made of PP with plug-in sleeve

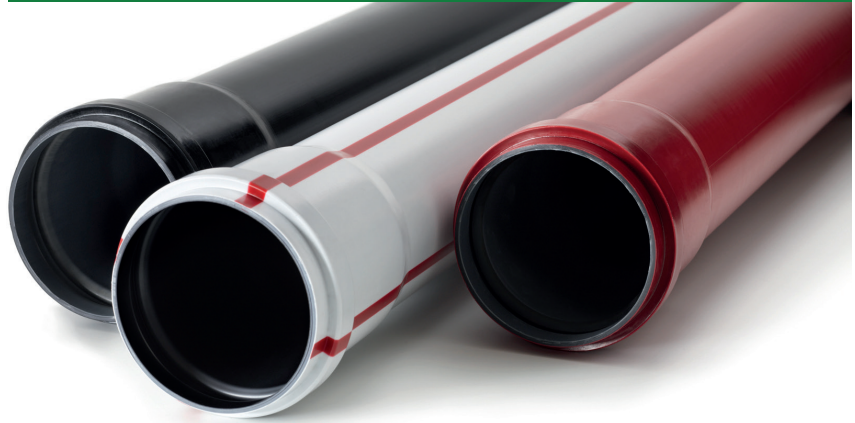

Standard design

Manufactured acc. to DIN 16878 or prEN 14285

| | |
|----------------------|---|
| Sleeve type | integrally moulded plug-in sleeve (SM) |
| Sealing ring | compression lip sealing ring, type "SX" (inserted in the factory) |
| Sharp end | with plug-in depth marking and chamfer |
| Length | 6 m |
| Colour | black |
| Inner surface | smooth |

Possible designs

| | |
|-------------------------|---|
| Length | 1 m bis 6 m |
| Coloured stripes | co-extruded |
| Colour | on request |
| Outer surface | fcoloured, co-extruded or solid-dyed |
| Inner surface | inner grooves for reducing the cable pull-in forces |
| Labelling | acc. to customer specifications |

| Item designation | Outer diameter (mm) | Wall thickness (mm) | SN type | Pallet contents (m) | Weight (kg/m) |
|-------------------------|------------------------|------------------------|---------|------------------------|------------------|
| KSR 63 x 3,0 SM | 63 | 3,0 | 16 | 1020 | 0,586 |
| KSR 110 x 3,4 SM | 110 | 3,4 | 4 | 516 | 1,120 |
| KSR 110 x 4,2 SM | 110 | 4,2 | 4 | 516 | 1,370 |
| KSR 110 x 4,7 SM | 110 | 4,7 | 8 | 516 | 1,590 |
| KSR 110 x 5,3 SM | 110 | 5,3 | 16 | 516 | 1,770 |
| KSR 110 x 6,3 SM | 110 | 6,3 | 16 | 516 | 2,020 |
| KSR 125 x 3,9 SM | 125 | 3,9 | 4 | 408 | 1,450 |
| KSR 125 x 4,8 SM | 125 | 4,8 | 4 | 408 | 1,765 |
| KSR 140 x 4,3 SM | 140 | 4,3 | 4 | 318 | 1,884 |
| KSR 160 x 4,9 SM | 160 | 4,9 | 4 | 234 | 2,320 |
| KSR 160 x 6,2 SM | 160 | 6,2 | 4 | 234 | 2,965 |
| KSR 160 x 6,9 SM | 160 | 6,9 | 8 | 234 | 3,350 |

Z.I.S. SPEZIALBAUSTOFFE GMBH

Karl-Rapp-Straße 1 · 92442 Wackersdorf · Germany
 Tel.: +49 (0)94 31 / 797 99-0 · Fax: +49 (0)94 31 / 797 99-20
 info@zis-spezialbaustoffe.de · www.zis-spezialbaustoffe.de



Wir sind Mitglied bei
 der Gütegemeinschaft
 Leitungstiefbau e.V.